



HYBRID STEPPING MOTOR HS1708A

☐ COLORS OF LEAD WIRES



☐ DIMENSIONS *unit=mm*

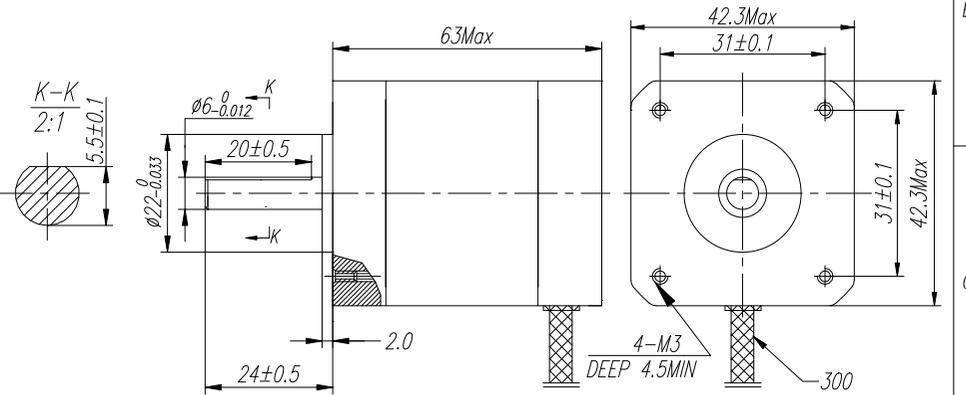

☐ SPECIFICATIONS

PHASE	2	PHASE	COMMENT
STEP ANGLE	1.8±5%	°/STEP	
VOLTAGE	5.46	V	
CURRENT	1.3	A/PHASE	
RESISTANCE	4.2 ±10%	Ω/PHASE	
INDUCTANCE	8.5 ±20%	mH/PHASE	
HOLDING TORQUE	75	N.cm Min	
DETENT TORQUE	4.0	N.cm Max	
INSULATION CLASS	B		
LEAD STYLE	AWG26 UL1007		

HS1708A

AMT LLC